

Modulayer

Surface mounted luminaires series

Surface



8601-SE-M1-185-H1


Hyperelliptic

Power	40W/50W
Beam angle	50°
CCT	2700K/3000K/3500K/4000K
Light source	COB
Light efficiency	100-110LM/W
UGR	<17
CRI	>90
Power supply	DC36V 1050mA
Operating temperature	-15°C-45°C

Dimming Options

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	Bluetooth

CE RoHS CB

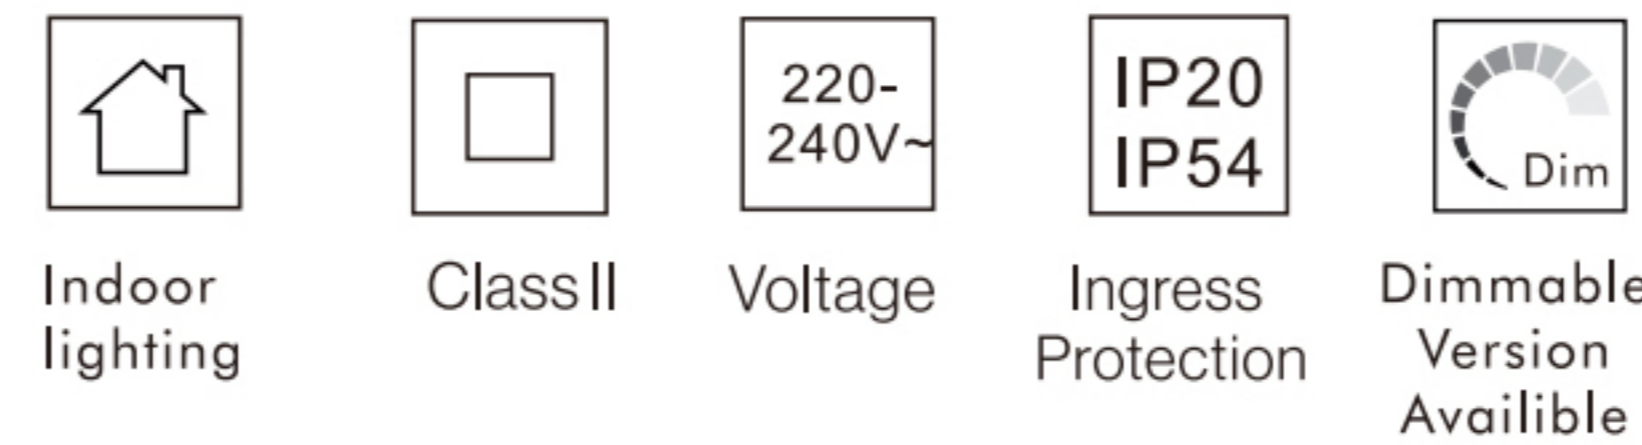

Beam Angles



50°

Surfaces

materials

Aluminium + PC


heatsink colors

Moon White Mineral Gold
 Star Grey Polar Black

surface shade

Translucent

Dimensions

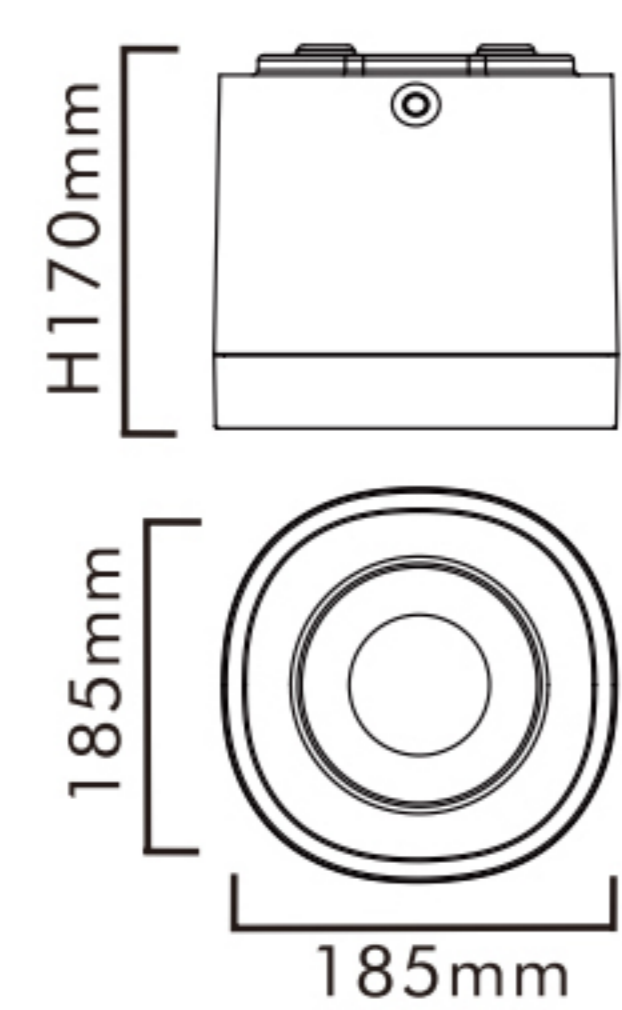

Performance

4000K 50W 24°

h(m)	E(lx)	D(m)
1		
2		
3		
4		

4000K 50W 50°

h(m)	E(lx)	D(m)
1		
2		
3		
4		

4000K 50W 50°

h(m)	E(lx)	D(m)
1	8764	1.01
2	2191	2.02
3	973	3.04
4	547	4.05

for further lighting effects refer to updates photometric and IES files.



project-driven interior lighting solution provider